

TABLE OF SIDEWALK
WIDTHS - "W"

SINGLE-FAMILY AREAS	4'
MULTI-FAMILY AREAS	5'
OTHER AREAS AS SPECIFIED BY THE LAND DEVELOPMENT REGULATIONS.	

* MINIMUM.

THIS DETAIL IS NOT TO BE USED
FOR PERMIT SUBMITTALS.




PLEASE USE THE GENERAL
STANDARD DETAIL BELOW FOR
SUBMITTAL.

BOYNTON BEACH ENGINEERING STANDARD DETAIL



SIMPLIFIED FOR RESIDENT COMPREHENSION
SIDEWALK CONSTRUCTION DETAIL
NOT TO BE USED FOR CONSTRUCTION

EFF. DATE
02/20
DETAIL. NO.
P-16

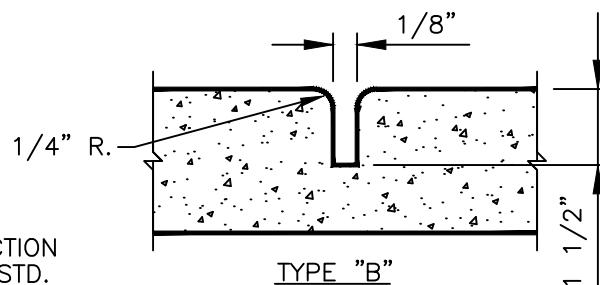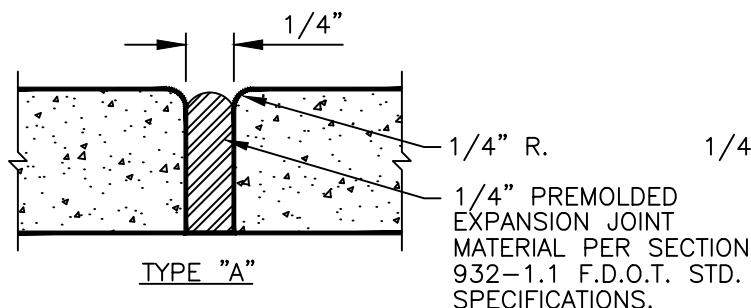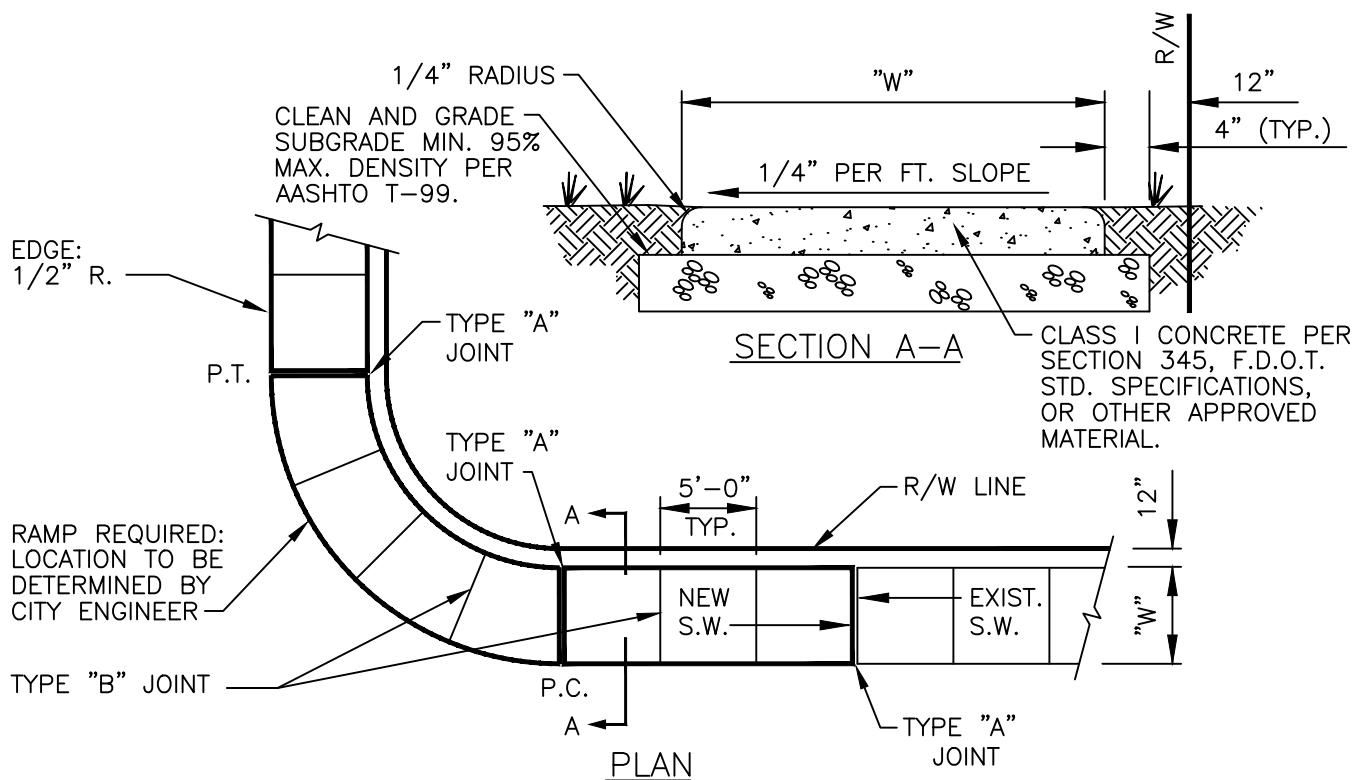

SIDEWALK JOINT

**TABLE OF SIDEWALK
THICKNESS - "T"**

RESIDENTIAL AREAS	4"
WITHIN 10' OF CROSS-STREETS, AT DRIVEWAYS & OTHER AREAS	6"

**TABLE OF SIDEWALK
WIDTHS - "W"**

SINGLE-FAMILY AREAS	4*
MULTI-FAMILY AREAS	5'
OTHER AREAS AS SPECIFIED BY THE LAND DEVELOPMENT REGULATIONS.	

* MINIMUM.

TABLE OF SIDEWALK JOINTS

TYPE	LOCATION
"A"	P.C. AND P.T. OF CURVES, JUNCTION OF EXISTING & NEW SIDEWALKS & EVERY 30'.
"B"	5'-0" CENTER TO CENTER ON SIDEWALKS SCORED DURING PLACEMENT OR SAWCUT WITHIN 24 HOURS OF PLACEMENT
"A"	WHERE SIDEWALK ABUTS CONCRETE CURBS, DRIVEWAYS, AND SIMILAR STRUCTURES

BOYNTON BEACH ENGINEERING STANDARD DETAIL